
# Concord Collection Cabinet Construction

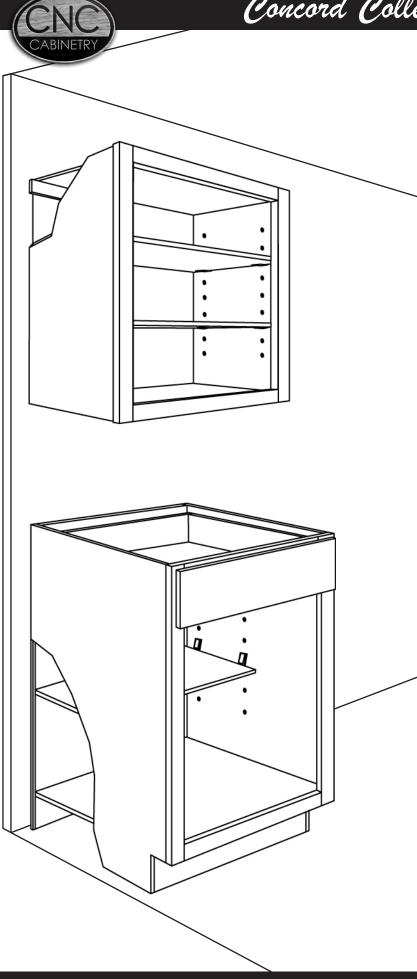

## **▼** Front Frame:

▶ 3/4" thick solid wood. 1-1/2" wide stiles and rails. Stiles and rails are dadoed to receive side panels.

#### **▼** Box Construction:

► 1/2" thick, plywood sides and full 1/2" back panel, finished interior with a natural birch wood veneer.

## ▼ Shelves:

▶ 3/4" thick, plywood. Fully adjustable in wall and base cabinets.

#### ▼ Drawer Box:

▶ 3/4" thick, solid maple dovetail sides. 1/2" thick plywood bottom.

#### **▼** Butt Doors:

► No center stile on all double door cabinets.

# **▼** Drawer Glides:

► High quality steel, full extension under mount with soft close safety feature.

# **▼** Hinges:

► Heavy duty steel concealed hinge, six way adjustable, with soft close feature.

#### ▼ Base Corner Braces:

High impact injection molded plastic.

# ▼ Cabinet Assembly:

Cabinet is constructed with staples and nails, dadoed and glued at all key structural points.